



Slant/Fin



www.slantfin.com

Series Gas Boiler

Condensing High Efficiency Stainless Steel

Make the right move.

When it comes to heating your home, it's important to choose a dependable boiler that will give you optimum fuel savings. The CHS boiler offers eight different sized models to match the heating requirements of the home. These boilers are modulating, condensing, stainless steel, wall mount boilers. With sizes ranging from 85,000-399,000 Btu/hr inputs and modulation up to 10:1 turndown maximizes your fuel savings. They offer installation flexibility with options such as top or bottom supply and return connections, top or bottom gas connections, vent runs of up to 150ft and five vent termination options.



Cascades up to 8 units

Efficiency

Engineered to the highest of standards, the CHS Stainless Steel Fire Tube design Heat Exchanger can deliver up to 99% Thermal Efficiency, low-nox emissions and a fully modulating burner. It is the clear choice when choosing a boiler in today's "Go Green" focused market.

Dependable

The new CHS Boiler is yet another example of Slant/Fin's goal of providing the very best heat exchanger designs and Condensing High Efficiency Boiler options to the industry. The CHS series boiler is manufactured to the highest industry standards. The ASME certified fire-tube exchanger is constructed of stainless steel for better corrosion resistance. Each boiler is factory tested three ways to be sure of top performance. The CHS Boiler, combined with Slant/Fin's industry leading Customer/ Technical Service departments, results in a sure fire winning choice.



Free 5 Year Parts & Labor Warranty when registered upon installation.*

* 5 year parts and labor warranty excludes- 300-399 models



Up to **95% AFUE**

- Cascading up to 8 units
- Stainless steel down-fired fire tube design
- Eight models from 85,000 to 399,000 BTU/Hr
- Full modulation up to 10:1 turndown
- Advanced Honeywell Sola Boiler Controller with backlit screen display
- Low NOx operation
- Venting to 150'
- 2" venting option on two models
- PVC, CPVC, Polypropylene or Stainless Steel venting



We Build Trust and Comfort

CHS Series Boiler

Boiler Features

- Easy to install and maintain
- Down-fired, Fire Tube stainless steel boiler
- Stainless steel internal water connections
- Certified internal low water cutoff with test button
- Fully-modulating combustion system
- Condensate pump electrical receptacle
- Built-in gas drip leg
- Wall-mount configuration with optional floor stand
- Improved venting orientation with flue test port
- On/off power service switch, built in
- High-quality metallic clear coat finish
- High-energy external spark generator for reliable ignition
- ASME certified boiler
- Certified ANSI Z21.13
- 15-year limited warranty

Control Features

- Accurate control with Honeywell Sola Boiler Control with backlit screen displaying system info with easy step by step programming
- Outdoor reset system water temperature improves efficiency and heating comfort
- Built in lead lag multiple boiler cascade control handles up to 8 CHS boilers. 4.2 – 10 mA boiler external boiler management input
- Can control three separate temperature setpoints
- Controls up to three circulators
 - a. DHW Circulator
 - b. Boiler Circulator
 - c. System Circulator
- Modbus capability is built in
- Built in boiler diagnostics
- Built in DHW and space heating control
- Shut down based on outdoor temperature
- Alarm contacts
- Freeze protection

Boiler Ratings

Model	C.S.A. Max Input NG/LP (MBH)	C.S.A. Min Input NG/LP (MBH)	D.O.E. Capacity (MBH)	Net AHRI (MBH)	A.F.U.E. %	Vent Diameter (Inches)	Max Vent Length NG/LP (Ft)	Approx. Water Content (Gal.)	Supply & Return Piping Male NPT (Inches)	Gas Connection Male NPT (Inches)
CHS-85	85/88	17/17.6	78	68	95.0	2" or 3"	150**	3.2	1	1/2
CHS-110	108/113	21.6/22.6	99	86	95.0	2" or 3"	150**	3.2	1	1/2
CHS-154	154	15.4	141	122	95.0	3	100	4.9	1 1/4	1/2
CHS-175	175	31	163	141	95.0	3	100	4.9	1 1/4	1/2
CHS-200	200	31	185	160	95.0	3	100	4.9	1 1/4	1/2
CHS-250	250	31	230	199	95.0	3	100	4.9	1 1/4	1/2
CHS-340	340	39.9	324	282	95.4*	4	100	6.4	1 1/2	3/4
CHS-399	399	39.9	380†	330	95.4*	4	100	6.4	1 1/2	3/4

**Max length of 150' for 3" venting only, 100' for 2" vent † Gross output * CHS399 & CHS340 efficiency is Thermal Efficiency • Reducer required

Down-fired Fire Tube

The CHS heat exchanger is ASME certified, burner is down-fired. The tubes have a dimpled design to optimize heat transfer, which increases energy efficiency. The Fire Tubes provide generous space for flue gas to pass, and significantly reduce the need for cleaning due to the vertical configuration and self-cleaning operation when in condensing mode.

Flexibility




The design of the CHS offers more flexibility than any other boiler on the market, with vent runs up to 150', five vent termination options, 2" optional venting on some models and plumbing and gas connections at either top or bottom.

User Interface

Provides easy navigation to all of the controller's parameters and setpoints. The backlit screen continuously displays system information to ensure safe and efficient operation.

The Control

The Slant/Fin CHS boiler has an advanced Honeywell control that provides easy navigation and offers complete auto-diagnostics. All the information needed to set up, monitor boiler functions and service is easy to access. The easy to use control allows for multiple circulators and temperature zones and has an integrated cascade feature to join multiple boilers.

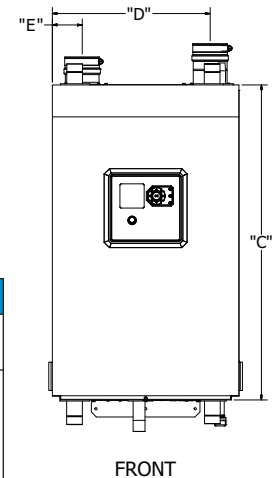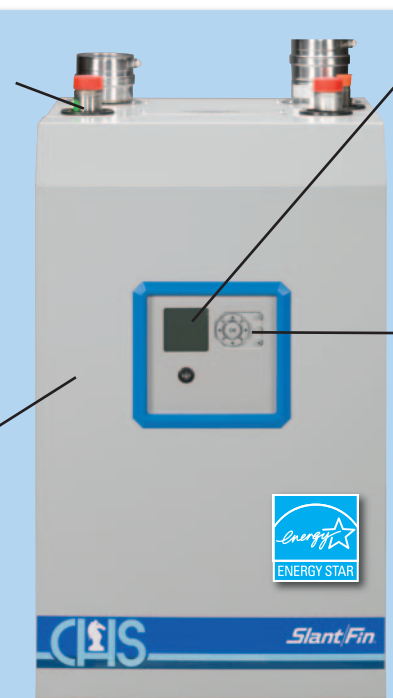

Boiler Dimensions

MODEL	"A"	"B"	"C"	"D"	"E"
CHS-85	19 3/4	14 1/2	33 3/8	16 7/8	3 5/8
CHS-110					
CHS-154					
CHS-175					
CHS-200	19 3/4	18 1/2	33 3/8	16 3/4	3
CHS-250					
CHS-340	25	20	36 3/8	22 1/2	3 7/8
CHS-399					



©Slant/Fin Corp. 2016 • Printed in the U.S.A. 816 • Publication No. CHS-10

SLANT/FIN CORPORATION, Greenvale, N.Y. 11548
Phone: (516) 484-2600 • FAX: (516) 484-0933

www.slantfin.com

