

Slant/Fin **VICTORY II**

America's best-built power vent gas boiler

New models!


- Economical home heating
- For new or replacement installations
- Versatile "chimneyless" design
- Near zero CO emissions
- Domestic hot water with optional indirect-fired water heater
- New features speed installation and reduce service time.



Slant/Fin VICTORY II

Power vent cast-iron gas boiler

Flexibility in venting

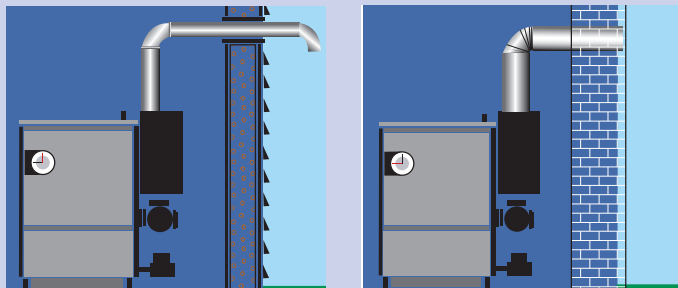

Power vents horizontally through the wall or vertically through the roof. Also vents into a chimney (models VHS-90, VHS-120, VHS-150 and VHS-180 only). Consult the Victory II boiler installation instructions for complete details and restrictions

Contractor-friendly features speed installation and reduce service time.

- **Horizontal flue outlet** with 3-inch connector for better performance.
- **Condensate drain** is built into the flue discharge assembly.
- **Drain tube** for condensate is factory installed.
- **Junction box** for power connection.
- **Pressure switch** is the same for all boiler sizes and all altitudes.
- **Intermittent pilot "spark" ignition** saves energy.

RATINGS and DIMENSIONS

RATINGS FOR NATURAL AND L.P. GAS



MODEL No.	RATINGS FOR WATER		NET I=B=R WATER (Btuh)†	NET WATER (Sq. ft)‡	EFFICIENCY (A.F.U.E.)
	A.G.A. INPUT (Btuh)	D.O.E. CAPACITY (Btuh)			
VHS-30	30,000	26,000	23,000	153	84.5
VHS-60	60,000	50,000	43,000	287	83.4
VHS-90	90,000	75,000	65,000	433	82.8
VHS-120	120,000	100,000	87,000	580	82.2
VHS-150	150,000	125,000	109,000	727	82.1
VHS-180	180,000	149,000	130,000	867	82.0

DIMENSIONS	
"A"	"B"
8 1/8"	14 5/8"
11 1/8"	17 7/8"
14 1/8"	20 5/8"
17 1/8"	23 3/8"
20 1/8"	26 5/8"
23 1/8"	29 5/8"



MAXIMUM EQUIVALENT FLUE LENGTH = 40 ft. for all models. May differ for certain vent system manufacturers and altitudes. See installation instructions, Pub. VHS-40.

Before purchasing this appliance read important energy costs and efficiency information available from your contractor.

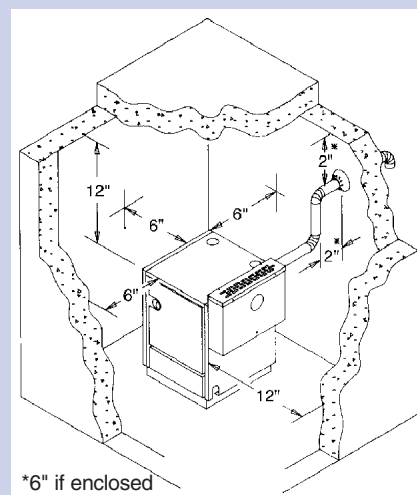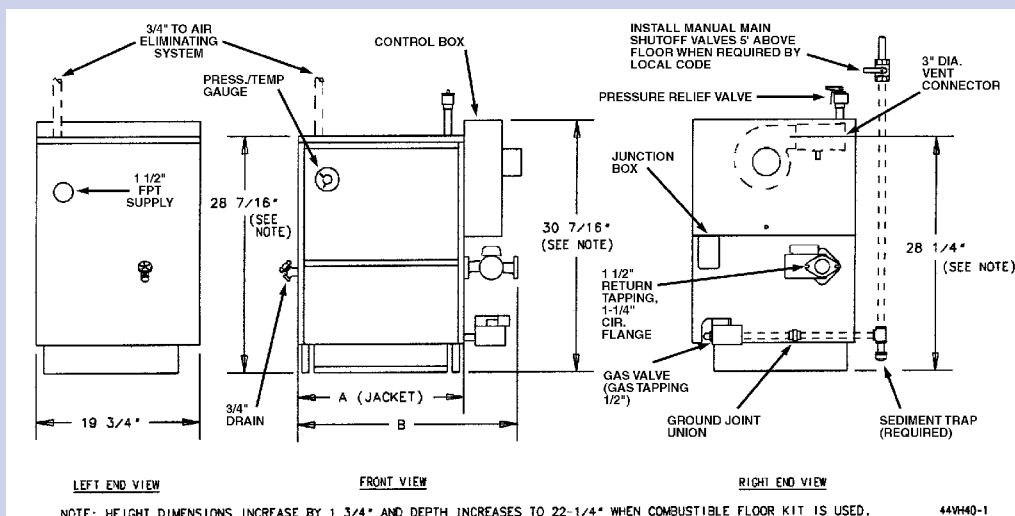

Supply water tapping	1 1/2"
Circulator return flange	*1 1/4"
Gas tapping, natural or propane	1/2"

* When not equipped with circulator, boiler 1-1/2" return tapping.
 † Crate dimensions: 34-5/8" length, 22-1/2" width, 33-1/2" height.
 ‡ AL 29-4C is a registered trademark of Allegheny Ludlum Corp.

Victory II "VHS" boiler minimum clearances for combustible construction

(See installation instructions for further details.)



SLANT/FIN CORPORATION, Greenvale, NY 11548 • (516) 484-2600

FAX: (516) 484-5921 • Canada: Slant/Fin LTD/LTEE, Mississauga, Ontario

© Slant/Fin Corp. 2000 Printed in the U.S.A. 200 Pub. No. VHS-10A

www.slantfin.com