




DIMENSIONS – GAS BOILERS

VSL

**Modulating, Condensing - High Efficiency
with optional Domestic Hot Water Generator**

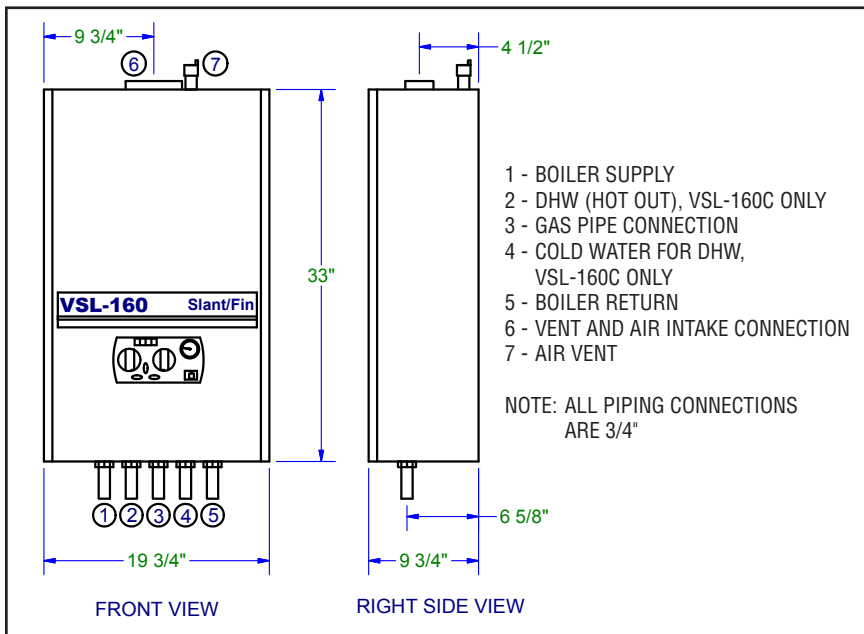

VSL VENT/AIR INTAKE OPTIONS

Concentric or separate vent and air piping may be used for venting of the VSL Boilers

Separate Vent & Air Piping: Special Adapter is required, available through Slant/Fin
 Venting Material: 3" CPVC sch. 40, 3" nominal Polypropylene or SS
 Air Intake Material: 3" PVC sch. 40, 3" nominal Polypropylene or SS
 Max allowed equivalent length 300 ft.

Concentric (Coaxial) Piping System: Components available through Slant/Fin
 Vent/Air Intake Material: 3.94"x 2.36" Polypropylene
 Max allowed equivalent length 70 ft.